

Operating panel



STARTING PROCEDURE

First of all, open the compressed air outlet valve and switch on the battery breaker inside the compressor.

Switch on the « Controller ON/OFF » key:
The START key flashes, press the START key:



The machine runs at IDLE speed. The machine is in the warm-up phase until it reaches the optimal conditions for switching to LOAD mode. Wait until the START key illuminates and the LOAD key flashes:



SHUTTING DOWN PROCEDURE

Press and hold the STOP key during more than 1 second:
The engine runs at idle speed and switches off when the timer has expired.

The START key flashes when the motor is switched off:



After the engine is switched off, wait one to three minutes before switching off the CONTROLLER ON/OFF key:



After switching off the controller, wait for approximately 30 seconds before turning off the battery breaker inside the compressor.

NEVER USE THE EMERGENCY STOP BUTTON TO SHUT DOWN THE MACHINE!



READING THE FAULT CODES

Press the Information key:




Navigate to the symbol of an *envelope* using the arrow keys:



Now this menu is displayed:

Code structure: -2100

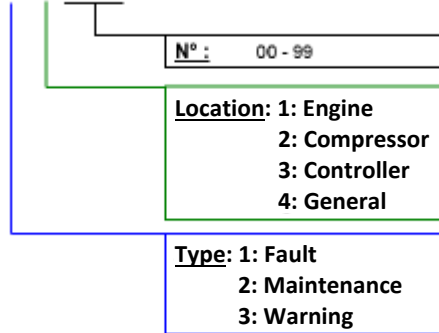

Call KAESER SERVICE Lyon at 04 72 37 44 10 and indicate the displayed message code.

SETTING THE COMPRESSED AIR DISCHARGE PRESSURE

The compressed air discharge pressure is set in the main menu by pressing the arrow keys

